


The Tomahawk Series LED



THK4

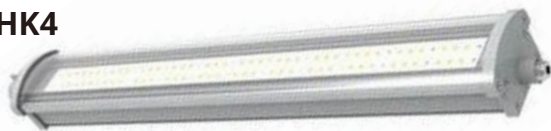

PROJECT NAME	
CATALOG #	
NOTES	

SPECIFICATIONS

Input Voltage	120/277V
Performance	120-140lm/W
Distribution	40°/60°/90°/120°
Mount Type	Hook/Wall/Pole
Wattages.....	40/60/80/100W
Kelvin Temperature	4000K/5000K
Color Rendering Index	>70

FEATURES

- >High luminous efficacy - Up to 120-140 lumens per watt
- >0-10V dimming
- >Available in four lengths
- >Beam angles are optional from 40°, 60°, 90°, and 120°
- >Smooth housing for easy cleaning
- >Emergency model optional - 1.5 hours emergency time
- >Robust design rated with IP66/IK10
- >Constructed of non-sparking materials for protection in flammable work sites

UL 844 Hazardous Locations
 Class I Division 2, Group A, B, C, D
 Class I, Zone 2, Group IIC
 UL 924 Emergency Lighting CSA C22.2#141-15, Ed.5
 CSA C22.2#137:2018 Ed.2
 ABS
 ETL
 IP66
 IK10
 500 hours salt spray

Applications

- Heavy Industrials Storage Facility
- Paper mills
- Wastewater Treatment Plants
- Loading Docks Platforms
- Offshore Environments
- Chemical Processing Facility Application
- Power Plants
- Petrochemical Processing Facility
- Metallurgical Industry
- Coal Mine
- Food and Alcohol industry

5-Year Standard Warranty
 LED lumen Maintenance: L70> 150,000 Operation Hours@55°C


Tomahawk ORDERING INFORMATION

SAMPLE ORDER NUMBER: THK4-3-4-1-1-1

Series	Wattage	CCT	Optics	Lens	Driver	Driver Voltage	Options
THK2	1) 20w	1) 3000K	1) 40°	1) Flat Glass	1) Dim	1) 120v-277v	1) BAA
	2) 40w	2) 4000K	2) 60°		2) Non-Dim		2) Battery Backup
THK4	1) 40w	3) 5000K	3) 90°				
	2) 60w		4) 120°				
	3) 80w						


The Tomahawk Series LED

Product Dimensions Unit: inch

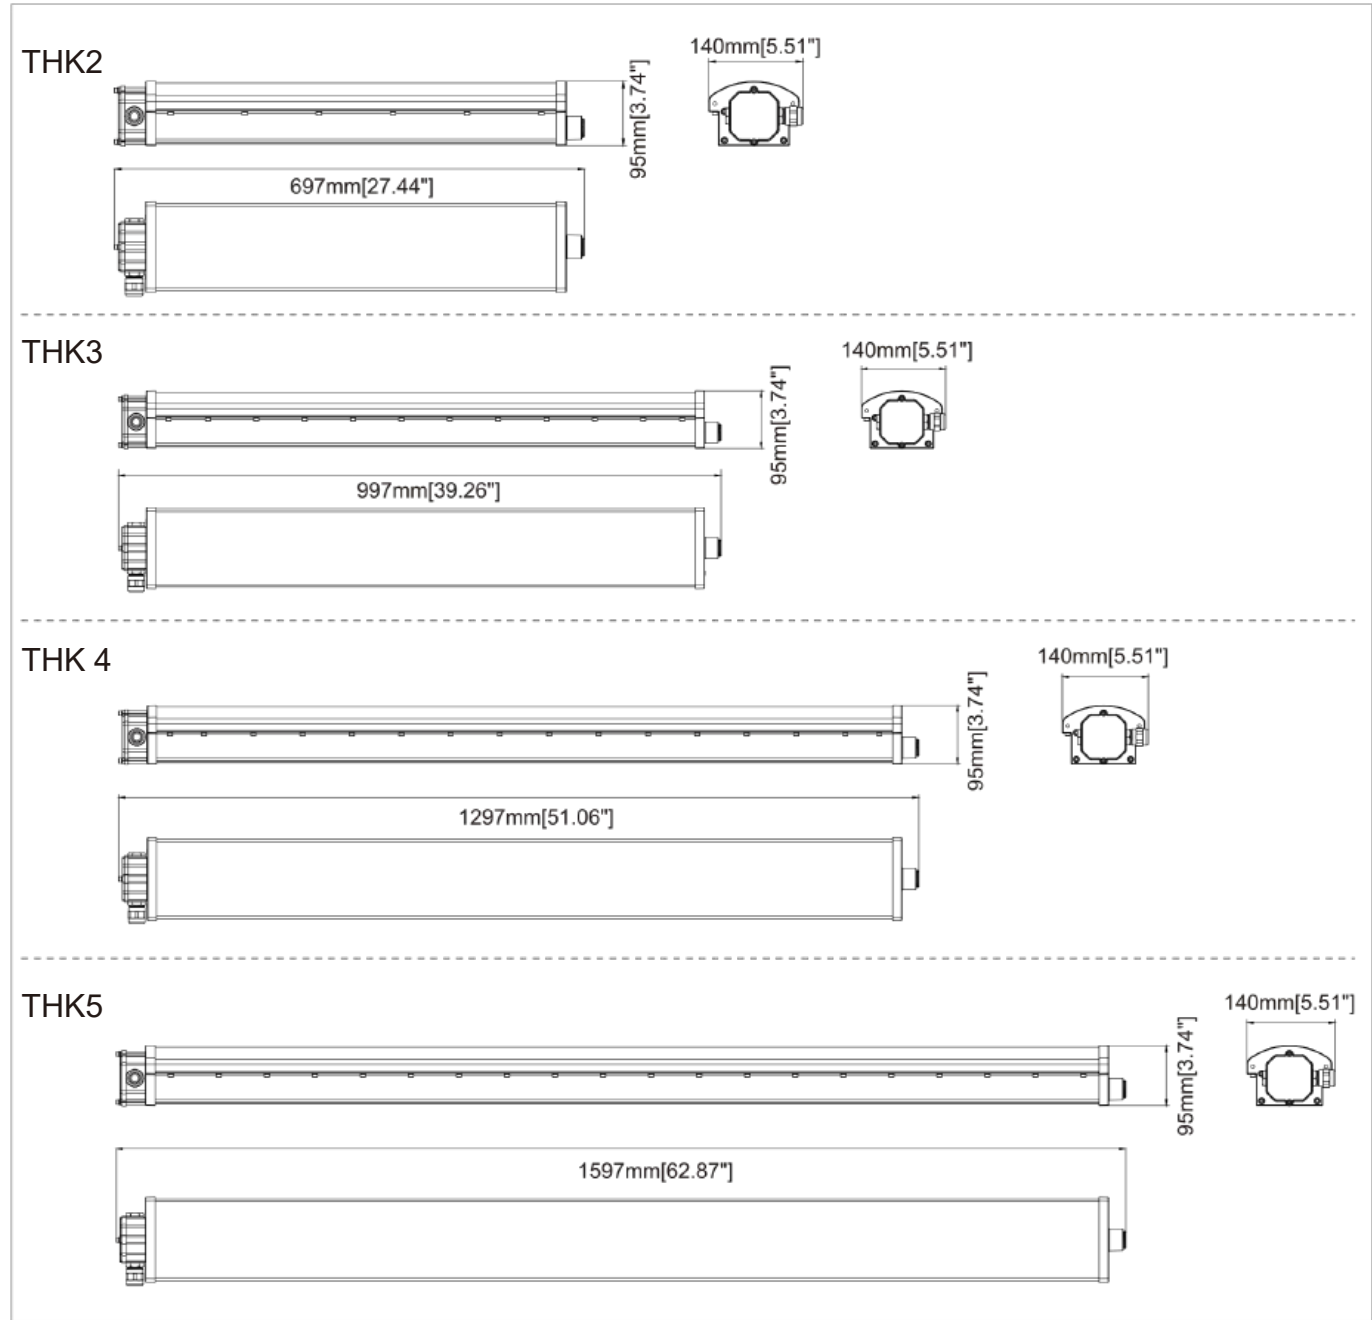

The Tomahawk Series LED

Distribution - Polar Plot

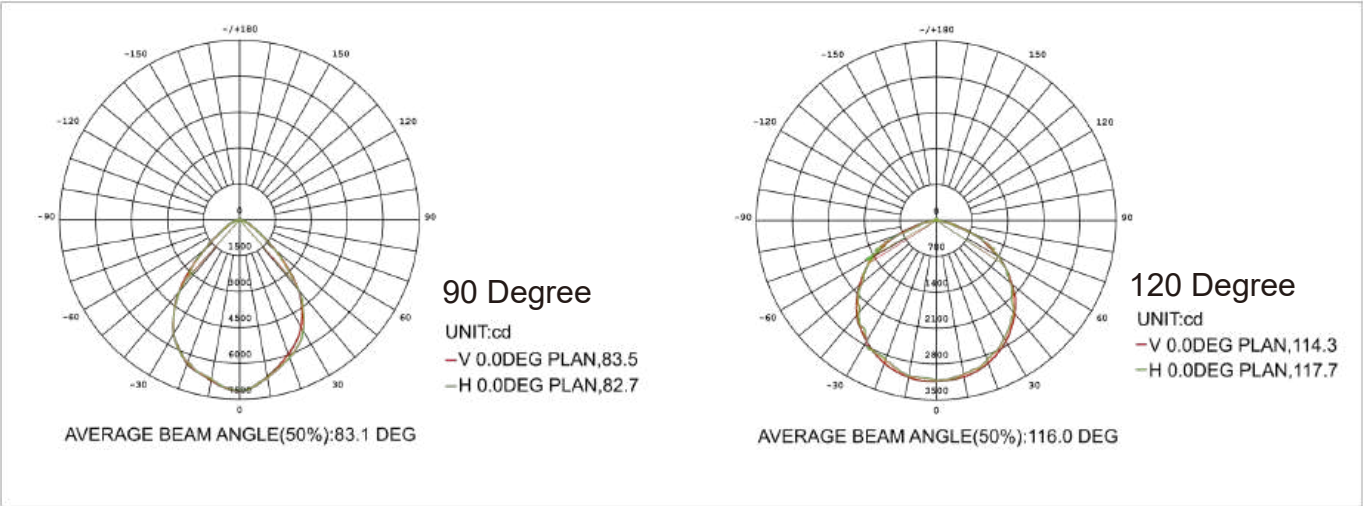

Mounting Methods

