

Turret Series LED

How You Round Out the Ultimate
Line of Industrial LED Lighting



WHEN YOU WANT TO GO ROUND, CALL IN THE BIG GUNS.

Round fixtures have their advantages. You don't have to worry about orientation. So, you can expedite installation. But don't sacrifice performance or longevity for convenience. With the Turret Series, you get that ideal combination of all three.



Military-Grade for Added Reliability

What does Tactik Military-Grade look like? Try a heat rating of up to 203°F with no fall-off in lumen output as temperatures approach the rated limit.



Keep Your Cool with a Remote Driver

Tactik features remote drivers to prevent unwanted heat build-up, extending fixture life. They also allow lighting layouts to be easily adjusted to plant floor updates - without costly re-gridding.



5-7 Day Lead Time

Our innovative modular design and advanced manufacturing capabilities allow us to ship all orders, even customizations, in 5-7 days.





Turret Series LED


Round Made Right

ENHANCE COOLING AND ELIMINATE RE-GRIDDING HEADACHES


With leading competitive units, the LED driver is inside the light, which results in a lot of heat. However, the Turret Series features remotely mounted drivers.

This approach helps keep the operating temperatures inside the fixture lower. It also allows more effective cooling of the driver, safeguarding the integrity of the driver as well as the LED light itself.


Should changes in plant floor layout dictate the need to alter fixture placement, this can be accomplished quickly and easily without re-gridding hassles. Simply change out the power cord for one of suitable length to reach the new location of the light.



Minimum Footprint




Driver Adjacent

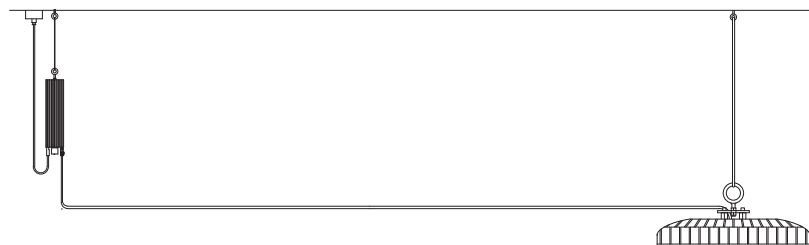

Extend As Needed

PRODUCT WATTAGE & DIMENSIONS

WATTS	DIMENSIONS
100 Watts	11.0" Diameter x 1.9" Height
150 Watts	15.8" Diameter x 2.2" Height
200 Watts	15.8" Diameter x 2.2" Height
250 Watts	18.1" Diameter x 3.5" Height
300 Watts	18.1" Diameter x 3.5" Height

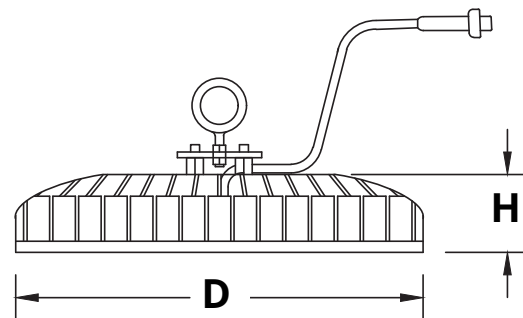

3115 N 21st Street, Suite 2, Sheboygan, WI 53083
920-287-3840

tactiklighting.com





Turret Series LED

Standard Temperature Specifications

SPECIFICATIONS

Power Factor.....	>0.9
Input Voltage	120/277V & 347/480V
Performance.....	Up to 163 lm/W
Operational Temperature.....	-40°F to 125°F (-40°C to 52°C)
Distribution.....	120°
Mount Type.....	Suspension
Available Wattages.....	100W, 150W, 200W, 250W, 300W
Kelvin Temperature	4000K, 5000K
Color Rendering Index (4000K)	>70
Color Rendering Index (5000K)	>90

FEATURES

- > Patent-pending remote driver minimizes fixture operating temperature and allows fixture to evolve with changing plant floor demands with no re-gridding required
- > Inventronics Drivers with less than 1% failure rate
- > Dimmable 0-10V
- > In-series transient voltage surge suppressor (TVSS) protects fixture against failure due to dirty power and power supply surges
- > Includes 10 Year Module Warranty
- > Operational Temperature up to 125°F (52°C)
- > Optional motion sensor. Choose from standard by Wattstopper with L7 lens (fig 1.1 & fig 1.2*), or Internet of Things (IOT) by Enlighted Sensors (fig 1.3).
- > UL 1598 listed
- > IP65 rated



LUMINOUS OUTPUT

WATTS	LUMENS
100 Watts	14,400 lumens
150 Watts	22,180 lumens
200 Watts	32,730 lumens
250 Watts	39,910 lumens
300 Watts	49,550 lumens

POWER CORDS & ACCESSORIES

DESCRIPTION	PRODUCT NUMBER
125V, 15 amp, Straight Blade, 6 ft	PC-PP-125-15-SB-6
125V, 15 amp, Straight Blade, 12 ft	PC-PP-125-15-SB-12
125V, 15 amp, Twist Lock, 6 ft	PC-PP-125-15-TL-6
125V, 15 amp, Twist Lock, 12 ft	PC-PP-125-15-TL-12
125V, 20 amp, Twist Lock, 6 ft	PC-PP-125-20-TL-6
125V, 20 amp, Twist Lock, 12 ft	PC-PP-125-20-TL-12
250V, 20 amp, Twist Lock, 6 ft	PC-PP-250-20-TL-6
250V, 20 amp, Twist Lock, 12 ft	PC-PP-250-20-TL-12
277V, 15 amp, Twist Lock, 6 ft	PC-PP-277-15-TL-6
277V, 15 amp, Twist Lock, 12 ft	PC-PP-277-15-TL-12
277V, 20 amp, Twist Lock, 6 ft	PC-PP-277-20-TL-6
277V, 20 amp, Twist Lock, 12 ft	PC-PP-277-20-TL-12
480V, 20 amp, Twist Lock, 6 ft	PC-PP-480-20-TL-6
480V, 20 amp, Twist Lock, 12 ft	PC-PP-480-20-TL-12
600V, 20 amp, Twist Lock, 6 ft	PC-PP-600-20-TL-6
600V, 20 amp, Twist Lock, 12 ft	PC-PP-600-20-TL-12
600V, Whip, 12ft	PC-PP-600-W-12
Turret Hub Hanger 0.5" Male	1278-5-M
Turret Hub Hanger 0.75" Male	1278-75-M
Turret Hub Hanger 0.5" Female	1278-5-F
Turret Hub Hanger 0.75" Female	1278-75-F

*All Motion sensor purchases come as a set, including a motion sensor and an L7 Wattstopper lens.

TURRET ORDERING INFORMATION

SERIES	WATTAGE	KELVIN	OPTICS	LENS	FINISH	DRIVER VOLTAGE	REMOTE CABLE	MOTION SENSOR	BATTERY BACKUP	DLC
TUR-6 Std Temp	100- (100W)	40- (4000K)	1- No	2- Flat Poly Clear	1- Black	1- 120/277V	1- 3'	X- No	X- No	1- Standard
	150- (150W)	50- (5000K)		6- Flat Tempered Glass Clear		4- 347/480V	2- 10'	1- Standard*	1- Yes	2- Premium
	200- (200W)						3- 25'	2- Internet of Things*		
	250- (250W)						4- 50'			
	300- (300W)						5-100'			
							6- 150'			
							7- 200'			
							8- 250'			

* Motion Sensor information: Standard (1) features sensors by Wattstopper with L7 lens. Internet of Things or IOT, (2) features sensors by Enlighted Sensors

** Fixture includes a 6 foot Whip Plug N Play Cord. For additional cord options, please see the Power Cord Table referenced above for ordering information.

3115 N 21st Street, Suite 2, Sheboygan, WI 53083
920-287-3840

tactiklighting.com





Turret Series LED

High Temperature Specifications

SPECIFICATIONS

Power Factor.....	>0.9
Input Voltage	120/277V & 347/480V
Performance.....	Up to 163 lm/W
Operational Temperature.....	-40°F to 185°F (-40°C to 71°C)
Distribution.....	120°
Mount Type.....	Suspension
Available Wattages.....	100W, 150W, 200W, 250W, 300W
Kelvin Temperature	4000K, 5000K
Color Rendering Index (4000K)	>70
Color Rendering Index (5000K)	>90

FEATURES

- > Patent-pending remote driver minimizes fixture operating temperature and allows fixture to evolve with changing plant floor demands with no re-gridding required
- > Inventronics Drivers with less than 1% failure rate
- > Dimmable 0-10V
- > In-series transient voltage surge suppressor (TVSS) protects fixture against failure due to dirty power and power supply surges
- > Includes 10 Year Module Warranty
- > Up to 185°F (85°C) at 60% light output, or up to 170°F (77°C) at 100% light output
- > Optional motion sensor. Choose from standard by Wattstopper with L7 lens (fig 1.1 & fig 1.2*), or Internet of Things (IOT) by Enlighted Sensors (fig 1.3).
- > UL 1598 listed
- > IP65 rated



LUMINOUS OUTPUT

WATTS	LUMENS
100 Watts	13,940 lumens
150 Watts	22,180 lumens
200 Watts	32,730 lumens
250 Watts	39,910 lumens
300 Watts	49,550 lumens

POWER CORD & ACCESSORIES

DESCRIPTION	PRODUCT NUMBER
125V, 15 amp, Straight Blade, 6 ft	PC-PP-125-15-SB-6
125V, 15 amp, Straight Blade, 12 ft	PC-PP-125-15-SB-12
125V, 15 amp, Twist Lock, 6 ft	PC-PP-125-15-TL-6
125V, 15 amp, Twist Lock, 12 ft	PC-PP-125-15-TL-12
125V, 20 amp, Twist Lock, 6 ft	PC-PP-125-20-TL-6
125V, 20 amp, Twist Lock, 12 ft	PC-PP-125-20-TL-12
250V, 20 amp, Twist Lock, 6 ft	PC-PP-250-20-TL-6
250V, 20 amp, Twist Lock, 12 ft	PC-PP-250-20-TL-12
277V, 15 amp, Twist Lock, 6 ft	PC-PP-277-15-TL-6
277V, 15 amp, Twist Lock, 12 ft	PC-PP-277-15-TL-12
277V, 20 amp, Twist Lock, 6 ft	PC-PP-277-20-TL-6
277V, 20 amp, Twist Lock, 12 ft	PC-PP-277-20-TL-12
480V, 20 amp, Twist Lock, 6 ft	PC-PP-480-20-TL-6
480V, 20 amp, Twist Lock, 12 ft	PC-PP-480-20-TL-12
600V, 20 amp, Twist Lock, 6 ft	PC-PP-600-20-TL-6
600V, 20 amp, Twist Lock, 12 ft	PC-PP-600-20-TL-12
600V, Whip, 12ft	PC-PP-600-W-12
Turret Hub Hanger 0.5" Male	1278-5-M
Turret Hub Hanger 0.75" Male	1278-75-M
Turret Hub Hanger 0.5" Female	1275-5-F
Turret Hub Hanger 0.75" Female	1278-75-F

*All Motion sensor purchases come as a set, including a motion sensor and an L7 Wattstopper lens.

TURRET ORDERING INFORMATION

SAMPLE ORDER NUMBER: TUR-5-100-40-1-6-1-1-1-X-X-1

SERIES	WATTAGE	KELVIN	OPTICS	LENS	FINISH	DRIVER VOLTAGE	REMOTE CABLE	MOTION SENSOR	BATTERY BACKUP	DLC
TUR-5 High Temp	100- (100W)	40- (4000K)	1- No	6- Flat Tempered Glass Clear	1- Black	1- 120/277V	1- 3'	X- No	X- No	1- Standard
	150- (150W)	50- (5000K)				4- 347/480V	2- 10'	1- Standard*	1- Yes	2- Premium
	200- (200W)						3- 25'	2- Internet of Things*		
	250- (250W)						4- 50'			
	300- (300W)						5-100'			
							6- 150'			
							7- 200'			
							8- 250'			

* Motion Sensor information: Standard (1) features sensors by Wattstopper with L7 lens. Internet of Things or IOT, (2) features sensors by Enlighted Sensors

** Fixture includes a 6 foot Whip Plug N Play Cord. For additional cord options, please see the Power Cord Table referenced above for ordering information.

3115 N 21st Street, Suite 2, Sheboygan, WI 53083
920-287-3840

tactiklighting.com





**Veteran owned,
so you can be confident
we have your back**



Tactik Labs is your added assurance of reliability.

Our LED lighting is designed to a higher standard. So is our validation process. At our in-house lab testing facility, our products undergo rigorous testing to provide you every assurance possible that all Tactik LED lighting will perform and last as promised. While others may talk about performance and reliability in harsh environments, Tactik Labs documents it.

Protecting you is second nature to us.

We protect distributors and customers with a 10-year warranty standard for added peace of mind. Plus, service after the sale includes a proactive warranty process – replacement is shipped immediately if a problem is identified and defective product is returned in its original box.



3115 N 21st Street, Suite 2, Sheboygan, WI 53083
920-287-3840 • sales@tactik.com

tactiklighting.com

